PIPE INSTALLATION

OPTIONS FOR THE INSTALLATION OF Groundbreaker®

OPTION 1

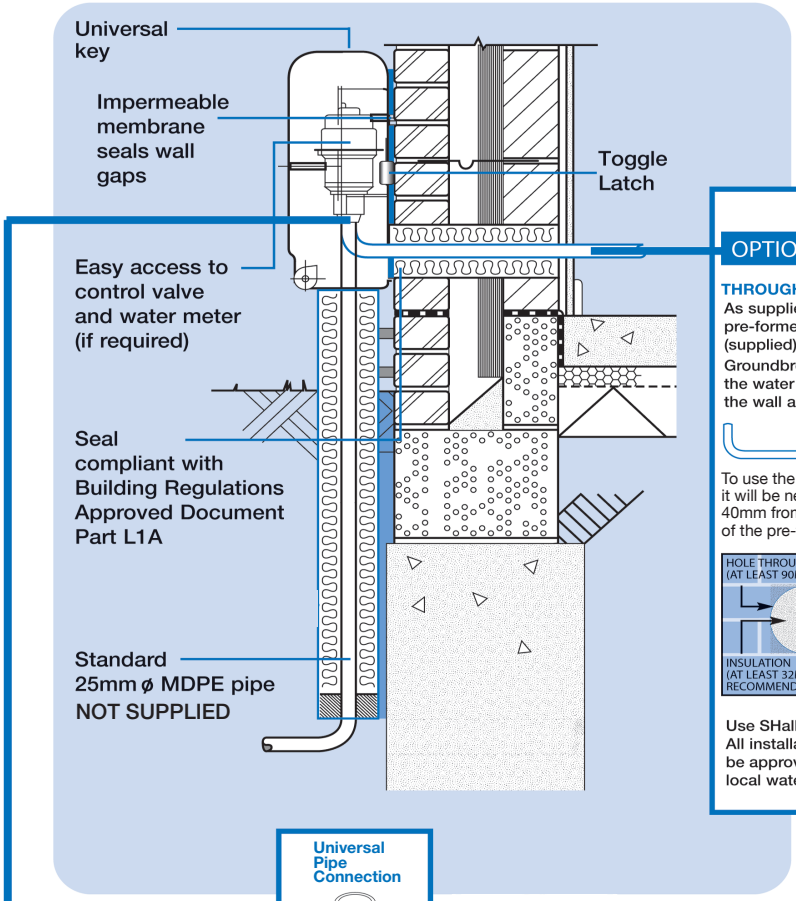

OPTION 1

THROUGH WALL

As supplied: Use 90° pre-formed bend (supplied) from Groundbreaker® to take the water supply through the wall and plumb as normal.

To use the universal pipe insert, it will be necessary to remove 40mm from the upstand end of the pre-formed PE pipe.



Use SHalloduct™ to insulate
All installations may need to be approved / certified by local water company.

CONNECTION DETAIL

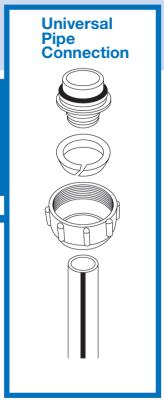

Failure to install Groundbreaker to this specification will eliminate the manufacturers guarantee and may result in a water company refusing to connect the water service

To view installation video - visit www.groundbreaker.co.uk

PIPE INSTALLATION

OPTIONS FOR THE INSTALLATION OF Groundbreaker®

OPTION 2

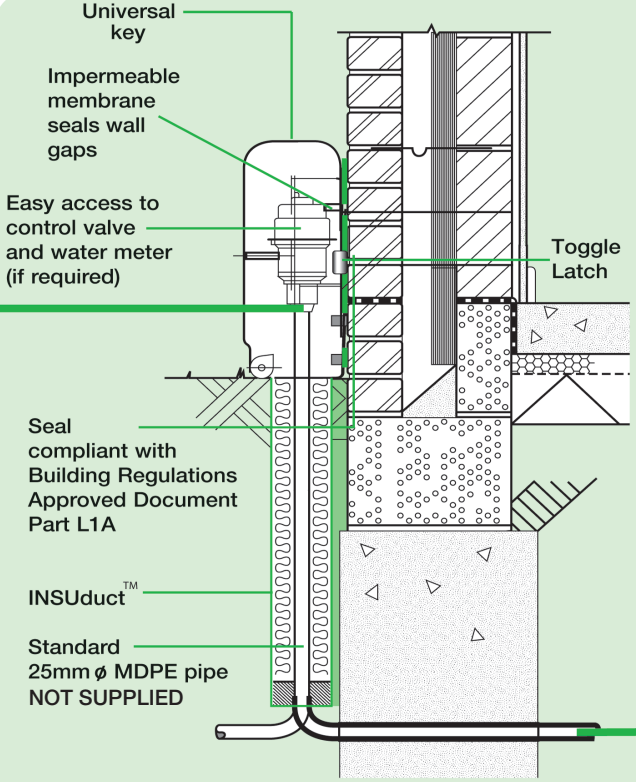

OPTION 2

UNDER FOOTINGS

Remove 90° pre-formed bend from Groundbreaker® and pipe through under the floor as traditional installations.

CONNECTION DETAIL

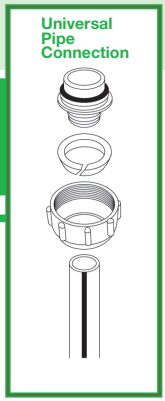

Failure to install Groundbreaker to this specification will eliminate the manufacturers guarantee and may result in a water company refusing to connect the water service

To view installation video - visit www.groundbreaker.co.uk